



# SC-41-0200-0001-99

## SmartCell Dual Input/Output Device for Fire Zones


### Overview

---

The SmartCell Input / Output Device is quick and easy to install and offers individual addressing at the SmartCell Control Panel.

Features include two resistor monitored inputs, two voltage free outputs and bidirectional 868 MHz communication.

This device is third party certified and compatible with the full SmartCell product range.

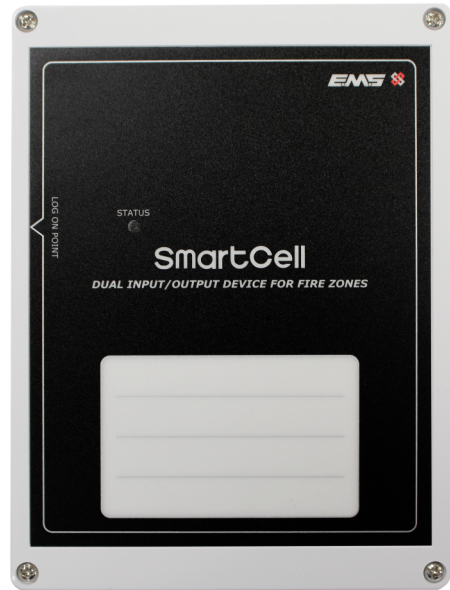

### Details

---

- Full wireless communication with panel
- Quick and easy to install
- Two resistor monitored inputs
- Two voltage free outputs
- For connection to remote fire devices

# SC-41-0200-0001-99

## SmartCell Dual Input/Output Device for Fire Zones

### Technical specifications

---

#### General

---

Wireless frequency	868 MHz
--------------------	---------

---

#### Input

---

Input quantity	2
Input type and rating	Resistor monitored inputs

---

#### Output

---

Output quantity	2
Output type and rating	Voltage free outputs, rated 1 A at 30 VDC

---

#### Physical

---

Physical dimensions	150 x 200 x 55 mm (W x H x D)
Net weight	0.45 kg
Mounting type	Wall mount
Batteries	3 x ER14505M 3.6 V lithium thionyl chloride batteries (Fanso or Titus)

---

#### Environmental

---

Operating temperature	-10 to +55°C
Storage temperature	-10 to +30°C (with batteries) -10 to +55°C (without batteries)
Relative humidity	95% noncondensing max.
Environment	Indoor

---

#### Regulatory

---

Compliance	CE
Certification	CPR
Standards	EN54-13 EN54-18 EN54-25

---



As a company of innovation, Carrier Fire & Security reserves the right to change product specifications without notice. For the latest product specifications, visit [firesecurityproducts.com](http://firesecurityproducts.com) online or contact your sales representative.

Last updated on 28 April 2022 - 20:03