

AACULP

Unidade de Controlo Deteção Linear Analógica Alarmline II - Programação via PC

General

The AACULP is a PC programmable, Analogue Linear Heat Detection (LHD) cable control unit. It provides monitoring for any of the Alarmline II range of LHD sensor cable, configuration of alarm and pre-alarm temperatures as well as enabling simple interface to a main fire alarm or BMS system.

Interface & Programming

The AACULP provides LED indications only and requires a PC to configure the control unit.

Pre-Alarm and Alarm thresholds can be set through simple menu options with no need for any graphs or nomograms. Initial set-up is done by measuring and entering the calibration resistance of the sensor cable removing the need to know the sensor cable length.

Volt free changeover contacts are provided inside the control unit for Pre-Alarm and Alarm signaling to a main fire alarm control panel or BMS system. A failsafe opto-isolated phototransistor fault output is also provided.

No user controls are provided on the control unit. An isolated input is provided enabling remote reset functionality.

Operation

As well as monitoring the LHD sensor cable for changes in temperature, the control unit also monitors for open and short circuit faults along the cable ensuring notification if the cable becomes damaged. It is fitted with its own internal temperature monitor and should the temperature within the controller enclosure reach 100°C (212°F), an alarm will be signaled.

Each control unit may have up to 500m (1640ft) of LHD sensor cable connected to it, acting as a single detection zone. When the LHD sensor cable and the control unit are installed in different areas, a suitable interposing cable can be used to make the electrical connection between them.



Detalhes

- UL521 and CE approval, UL/ULC listed
- Up to 500m of sensor cable per zone
- Separate pre-alarm and alarm signals
- Easy programmable interface
- Enclosure temperature alarm
- IP66 rated enclosure
- No nomograms or charts required

AACULP

Unidade de Controlo Deteção Linear Analógica Alarmline II - Programação via PC

Especificações técnicas

Elétrica

Tensão de operação	20 to 28 VDC
Consumo de corrente	<70mA (Pre-alarm & alarm) <50mA (Pre-Alarm) <50mA (Alarm) <40mA (Fault) <40mA (Quiescent)

Deteção

Comprimento da zona	30.5 m to 500 m (100 ft to 1640 ft)
---------------------	-------------------------------------

Físico

Dimensões físicas	182 x 180 x 90 mm (W x H x D) 7 1/8" x 7 1/8" x 3 1/2" (W x H x D)
Peso líquido	735 g
Colour	Cinzento claro
Tipo de montagem	Montagem embutida
Materiais (caixa)	Polycarbonato

Ambiental

Temperatura de operação	0 to +50°C
Humidade relativa	0 to 95% max. noncondensing 75% for <75 m cable & 54°C alarm setting
Ambiente	Interior, Exterior
Classificação IP	IP66 IK08

Regulamentação

Certificação	CE, UL
--------------	--------

Output


Pre-Alarm (Form C relay resistive load)	2 A @ 30 VDC / 0.25 A @ 250 VAC (62.5 VA)
Alarm (Form C relay resistive load)	2 A @ 30 VDC / 0.25 A @ 250 VAC (62.5 VA)
Fault (Opto-isolated phototransistor output) Max.	50 V @ 20 mA

Input

Remote reset (isolated)	20 to 28 VDC
	5 s pulse

Detection

Ambient Temperature upAlarm Temperature - 54°C to 30°C
Ambient Temperature upAlarm Temperatures - 64°C / 72°C / 79°C to 47°C
Ambient Temperature upAlarm Temperatures - 86°C / 100°C to 69°C

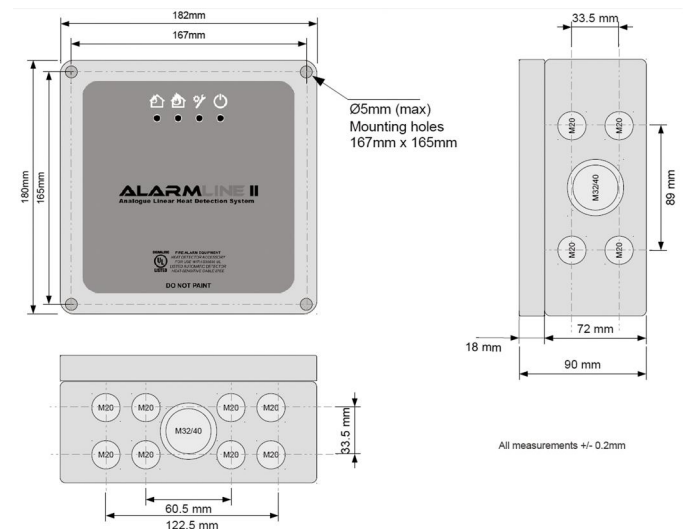

Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 11 April 2024 - 14:00