

ASC367

Sirene Vermelha de Teto com Alarme Visual EN54, Base Alta - Convencional

General

The ASC367 is a RED, general purpose, ceiling mount, electronic sounder and beacon for fire alarm applications. It features a special base containing all wiring connections allowing for easy placement or removal of the device. With an EN54-23 approved coverage pattern of C-3-8.9 for the beacon, each ASC367 may be mounted up to 3m high and provide a 8.9m cylinder diameter coverage. A room size of 6.3 x 6.3m square room may therefore be covered with a single device.

Easy and Fast Installation

The ASx360 series alarm sounder/beacons allow faster installation and maintenance thanks to an innovative mounting base. Dispensing with the need for locking screws these devices use TimeSaver™ bases from the 630 series detector lines. Heads are simply locked onto the base with a “twist and click” action, allowing fitting or removal at any time because the base is the only component that needs to be wired. As the cabling requirement is reduced, commissioning time and costs are naturally reduced as well.

Efficient and versatile

The ASx360 series sounders provide high sound output at a low current, thus reducing power requirements and system cost. They are supplied with a volume control as standard, allowing final audio adjustments to be made during installation. With a choice of 32 different tones (see tones table in manual), which are switch selectable, the required tone can be selected during installation.

The ASx360 series beacons utilise a specially designed lens giving a uniformed light output over the specified coverage area.

The mechanism for locking the device to the base may be activated if required. Once activated, a special tool is required to remove the sounder from the base.



Detalhes

- High sound output with Pulse Alert™ technology
- 32 Tones user selectable
- Automatic synchronisation
- Volume control and adjustable flash rate
- Anti-Tamper locking mechanism
- Deep mouting base with side cable entry and wiring to the base
- Weatherproof
- Seperate sounder and beacon and control
- EN54:3 and EN54:23 approved, CPR Certified

ASC367

Sirene Vermelha de Teto com Alarme Visual EN54, Base Alta - Convencional

Especificações técnicas

Geral

Monitorização de linha Polarised input

Elétrica

Tensão de operação 17 to 60 VDC

Consumo de corrente Beacon: 20 mA @ 0.5 Hz, 40 mA @ 1 Hz
Sounder: 5.1 mA

Sirene

Nível de saída Continuous operation
85 to 97 dB(A) (Sound output @ 1 m, tone dependant)

Tons selecionáveis 32

Sincronização Phased start (Automatic)

Físico

Dimensões físicas 97.5 x 117 mm (Ø x D)

Peso líquido 215 g

Cor Vermelho

Material Alto impacto policarbonato

Ambiental

Temperatura de operação -25 to +70°C

Humidade relativa 5 to 95% noncondensing

Ambiente Interior, Exterior

Classificação IP IP65

Regulamentação

Certificação EN54-23, EN54-3

Physical

Housing colour Red

Flash colour Red

EN54-23 rating


Light coverage C-3-8.9

Mounting position Ceiling

Mounting height up to 3 m

Floor coverage up to 8.9 m diameter

EN54-23 Coverage: C-3-8.9

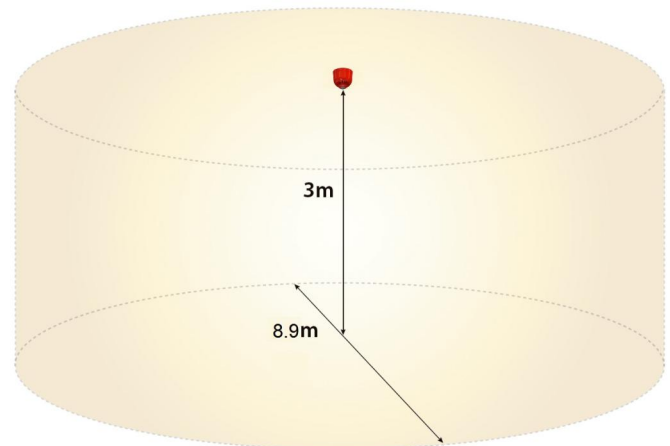

Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 13 September 2024 - 13:51