

ASW377

Sirene Vermelha Alta Potência com Flash, Seleção de Toque - Convencional

General

The ASW377 is a high output electronic sounder with beacon for fire alarm applications. It offers an IP66 rating which makes it ideal for outdoor applications. It also features a special base containing all wiring connections and allow for easy removal/placement of the sounder. To allow more flexibility the user can select between 64 tones, have the option of a 3rd stage tone and can select between different flash modes. With an EN54-23 approved coverage pattern of W-2.4-7.5 for the beacon, each ASW377 may be mounted up to 2.4m high and cover a square room of 7.5 x 7.5m with a single device.

Easy and Fast Installation

The ASW377 sounder-beacon allows faster installation and maintenance thanks to an innovative mounting base. Connections are made to the base during the initial wiring phase, resulting in faster and more reliable installations. In addition, the head clicks into place and is fixed by four quarter turn fasteners, avoiding the need to screw up four individual screws thus enabling faster installation and accurate seal compression for weatherproofing.

Efficient and versatile

The ASW377 provide high sound output at a low current, reducing power requirements and system cost. The sounder is supplied with a volume control as standard, allowing final audio adjustments to be made during installation.

With a choice of 64 different tones (see tones table in manual), which are switch selectable, the required tone can be selected during installation. A second and third tone are available for additional sound requirements and are separately controlled.

IP66 as standard means that the ASW377 can be installed in almost any location.



Detalhes

- High sound output
- 64 Tones user selectable
- Automatic synchronisation
- Volume control and adjustable flash rate
- Mounting base with wiring to the base
- Three stage alarm support
- IP66 Weatherproof
- EN54:23 and CPD Certified

ASW377

Sirene Vermelha Alta Potência com Flash, Seleção de Toque - Convencional

Especificações técnicas

Geral

Monitorização de linha Polarised input

Elétrica

Tensão de operação 17 to 60 VDC

Consumo de corrente 10 to 50 mA @ 24 VDC Sounder (tone dependant)
65 mA @ 0.5 Hz (Beacon)

Sirene

Nível de saída 104 to 116dB(A) @ 24 VDC (Sound output @ 1 m, tone dependant)
Continuous operation

Tons selecionáveis 64

Sincronização Phased start, Automatic synchronisation

DAV

Cobertura do piso up to 7.5 x 7.5 m

Físico

Dimensões físicas 166 x 189 x 149.5 mm (W x H x D)

Peso líquido 1.2 kg

Cor Vermelho

Tipo de montagem Montagem em parede

Posição de montagem Parede

Altura de montagem up to 2.4 m

Material Alto impacto policarbonato

Ambiental

Temperatura de operação -25 to +70°C

Humidade relativa 5 to 95% noncondensing

Ambiente Exterior

Classificação IP IP66


Regulamentação

Certificação EN54-23, EN54-3

EN54-23 rating

Light coverage W-2.4-7.5

EN54-23 Coverage: W-2.4-7.5

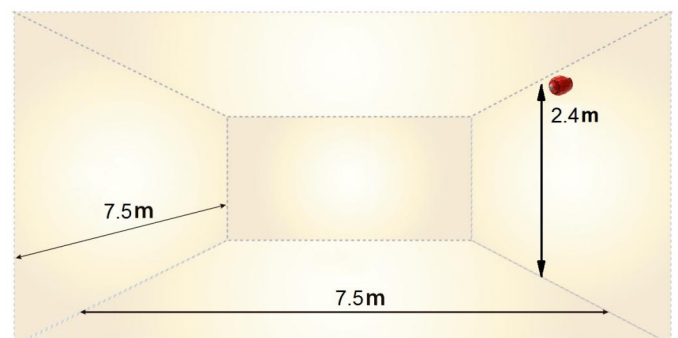

Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 16 September 2024 - 8:43