

Eye-Sight


This series is designed for security professionals and offers superior image quality, advanced AI analytics, seamless connectivity, and unparalleled insight and protection, with options and configurations to meet specific needs. The Check Point Quantum IoT Nano and DDA2 Analytics provide detailed attribute analysis and advanced threat prevention.



DI-340IPE-MVF

40m IR 4MP DDA Analytics Motorized Lens Large Dome/Turret Camera

Equipped with a 2.8-12mm motorized lens, this 4MP Dome/Turret camera is designed for medium distance surveillance (up to 40m) in both indoor and outdoor scenarios. The camera offers broad possibilities for Analytics, from Face Detection all the way to the outstanding DDA Analytics (Detect, Distinguish, Alert) which has the ability to perform object recognition and object counting. With a various of detection rules and triggers, DI-340IPE-MVF camera will help to put an end to false alarms.

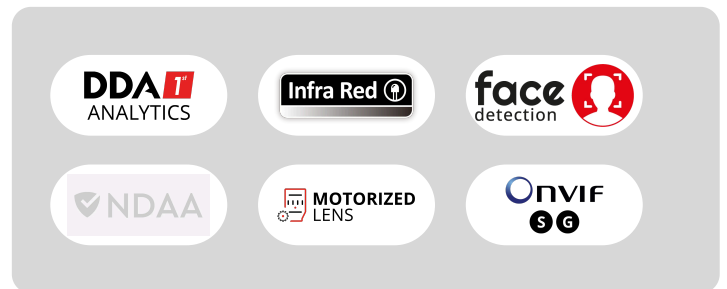

MAIN FEATURES

- DI-340IPE-MVF 4MP MVF Turret Camera with IR LED and DDA1 Analytics
- Sensor: 1/3" CMOS (16:9)
- Resolution: 2592×1520 25/30FPS (4MP)
- Lens: 2.8-12mm MVF with Auto Focus (94.3°-29.9°)
- True Day&Night – ICR
- Illumination: 40m (3 High-Power IR LED)
- Compression: H.265+ / H.264+ / H.265 / H.264 / MJPEG
- Object Recognition (Sterile Area, Line Crossing, Object Counting),
- Face Detection (10 Faces per frame), Camera Tampering
- True WDR (120dB), BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 128Gb)
- Built-in Microphone + Audio input
- ONVIF: Profile S/G
- Water Proof: IP67
- Weight: ~640g
- Power: DC12V/~900mA / PoE/~10W



<https://provision-isr.com>

SPECIFICATIONS

| 3rd Party Cyber Protection | |
|----------------------------|--|
| General | N/A |
| Protection Methods | N/A |
| NDAA Compliant | |
| NDAA Compliant | No |
| Video | |
| Image Sensor | 1/3" CMOS (16:9) |
| Effective Pixels | 2592×1520 |
| Electronic Shutter | 1/25s ~ 1/100000s |
| Day & Night | ICR |
| Min. Illumination | Day: 0.1lux / Night: 0.005lux (@F1.6, AGC On) 0lux with IR on |
| Audio | |
| Audio compression | G.711A/G.711U |
| Communication | One-way Audio |
| Image | |
| Image Settings | AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable |
| Image Enhancement | True WDR (120dB), BLC, HLC, ROI |
| Noise Reduction | 3D-DNR |
| Image Orientation | Mirror/Flip, Corridor Mode |
| Privacy Zone | Yes |
| Events and Analytics | |
| Analytics | Object Recognition (Sterile Area, Line Crossing, Object Counting), Face Detection (10 Faces per frame), Camera Tampering |
| Motion Detection | Yes |
| Compression | |

| | |
|--------------------------|--|
| Resolution | 4MP / 2K / 3MP / 2MP / 1MP / D1 / QVGA / CIF |
| Frame Rate | 1-25/30FPS In Normal Mode. 1-50/60FPS in HFR Mode*** |
| Video Compression | H.265+/ H.264+ / H.265 / H.264 / MJPEG** |
| Multi-Stream | Master Stream: 4MP(2592x1520) / 2K (2560x1440) / 3MP / 2MP / 1MP Sub-Stream: 1MP/QVGA/D1/CIF Third Stream: QVGA/D1/CIF (1~30fps) |
| Bit Rate | 64Kbps ~ 7Mbps@H.265 / 64Kbps ~ 8Mbps@H.264 |
| Encode Mode | VBR/CBR |
| Image Quality | Five levels under VBR; Free adjustment under CBR |


| Lens | |
|-----------------------------|--|
| Lens (Field of View) | 2.8-12mm MVF with Auto Focus (94.3°-29.9°) |
| Iris | DC Iris |
| Lens Mount | Ø14 Mount |

| Network | |
|--------------------------|---|
| User Access | Supports simultaneous monitoring for up to 10 users with multi-stream real time transmission |
| Network Protocol | IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS, P2P |
| Remote Monitoring | IE Browsing, VMS Software, Provision Cam2 Mobile App |
| Ethernet | 100Mbps |
| ONVIF | Profile S/G |

| Connectivity | |
|---------------------------|---|
| Network | RJ45 (+PoE) |
| Audio Connectivity | Built-in Microphone + Audio input |
| Alarm | No |
| SD Card | Event/Schedule based Main/Substream recording (Up to 128Gb) |
| Wiegand | No |

| | |
|----------------------------|------------------------------|
| Power | DC Socket |
| Analog Video Output | No |
| Housing | |
| PoE | Yes |
| Illumination | 40m (3 High-Power IR LED) |
| Power Supply | DC12V/~900mA / PoE/~10W |
| Protection Rate | Water Proof: IP67 |
| Work Environment | -30°C~60°C, 10%~90% Humidity |
| Bracket | 3-Axis Bracket |
| Dimensions | Ø113mm×99.6mm |
| Weight (gross) | ~640g |
| Hard Reset Button | Yes |

DIMENSIONS

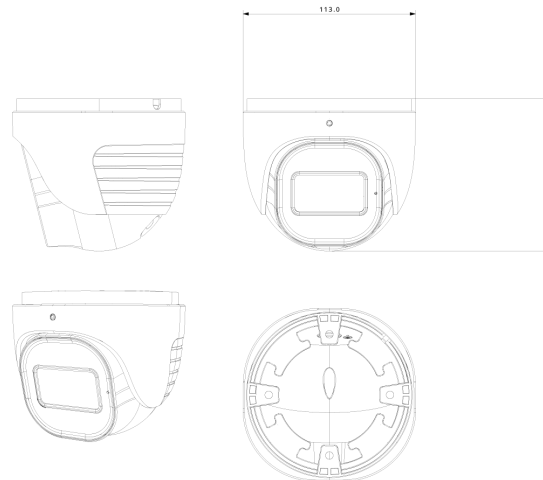

ACCESSORIES

