

## HD PRO


Series marked for the installer looking for a high-level camera emphasizing the difference in image quality. The Pro series cameras are suitable for indoor and outdoor applications where professional video surveillance is required.



# DI-350A-MVF-G

## 40m IR 5MP Motorized Lens Large Dome/Turret Camera

Equipped with a 2.8-12mm motorized lens, This 5MP dome/turret camera is designed for medium distance surveillance (up to 40m) for both indoor and outdoor scenarios. Featuring 4in1 technology selectable by a protected dipswitch the camera is ideal for Plug & Play over existing analog infrastructure.

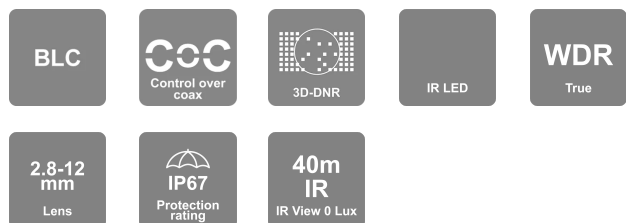

## MAIN FEATURES

- DI-350A-MVF-G 40m IR 5MP Motorized Lens Large Dome/Turret Camera
- Sensor: 1/2.7" 5MP CMOS Sensor
- Selectable Output: 5MP: 2592×1944 AHD/TVI 4MP: 2560×1440 AHD/TVI/CVI CVBS: 700TVL
- Lens: 2.8-12mm Mega-Pixel Motorized Vari-Focal ( 84°-32° )
- True Day&Night-ICR
- Digital WDR

- 3D-DNR/Digital WDR/BLC
- Illumination: 40m (3 High-Power IR LED)
- IP67
- Weight: 675g
- Power: DC12V/620mA



<https://provision-isr.com>

## SPECIFICATIONS

| Video                  |  |
|------------------------|--|
| Image Sensor           | 1/2.7" 5MP CMOS Sensor   |
| Image Format           | 5MP - 4:3. 4MP - 16:9  |
| Effective Pixels       | 2608x1960  |
| Scanning System        | Progressive  |
| Min. Illumination      | Color : 0.01lux @F1.2, AGC ON B/W : 0lux with IR               |
| Day & Night            | True Day&Night-ICR   |
| Day & Night Modes      | Ext/Auto/Day/Night   |
| Compression            |  |
| Resolution             | 5MP: 2592x1944 AHD/TVI 4MP: 2560x1440 AHD/TVI/CVI CVBS: 700TVL |
| Frame Rate             | 25/30FPS   |
| Image                  |  |
| Backlight Compensation | BLC  |
| S/N Ratio              | ≥52dB (AGC OFF)  |
| Privacy Zone           | no   |
| Noise Reduction        | 3D-DNR   |
| Image Enhancement      | Digital WDR, BLC   |
| Image Orientation      | Mirror/Flip  |
| On Screen Data         |  |
| CoC Support            | Yes  |
| OSD Menu               | Available via CoC Only   |
| Lens                   |  |
| Field of View          | 2.8-12mm Mega-Pixel Motorized Vari-Focal ( 84°-32° )           |
| Iris                   | DC Iris  |

|                           |   |
|---------------------------|---|
| <b>Lens Mount</b>         | Ø14 Mount   |
| <b>Connectivity</b>       |   |
| <b>Video Output</b>       | 5MP / 4MP (Selected by OSD Menu) AHD/TVI/CVI/CVBS + PAL/NTSC (Selected by DIP Switch) |
| <b>Audio Connectivity</b> | N/A   |
| <b>Housing</b>            |   |
| <b>Illumination</b>       | 40m (3 High-Power IR LED)   |
| <b>Bracket</b>            | 3-Axis Bracket  |
| <b>Protection Rate</b>    | IP67  |
| <b>Dimensions</b>         | Φ113*99.6mm   |
| <b>Weight (gross)</b>     | 675g  |
| <b>Power</b>              | DC12V/620mA   |
| <b>Work Environment</b>   | -30°C ~ 50°C , 10% ~ 90% humidity   |

## DIMENSIONS

