For this drawing we reserve all rights. The transfer, duplication, utilisation and distribution to third persons is expressly prohibited without permission. All patent trademarks and other rights in and to this drawing and design are reserved. (DIN ISO 16016-2002)

Freigabe:

Confidential

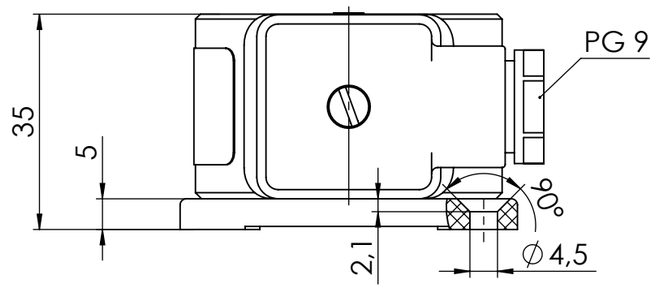

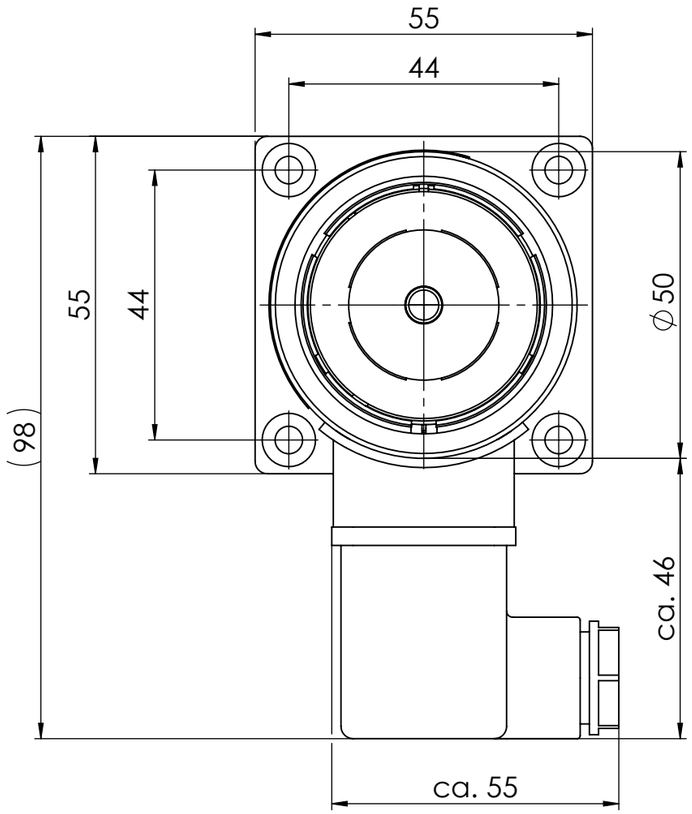

Technische Daten: (Technical Data)

Elektromagnetische Komponente nach VDE 0580
(Electromagnetic components based on VDE 0580)

Nennspannung: (nominal voltage)	24V DC
Einschaltdauer: (duty cycle)	100 % ED
Nennleistung: (nominal power)	1,5W
Schutzart: (types of protection)	Gerät (device) IP65 Anschluss (connector) IP65
Thermische Klasse: (thermic class)	B (130°C)
Oberflächenschutz: (surface protection)	Korrosionsbeständigkeit nach DIN50979 - Beanspr.-stufe 1 / CrVI-frei (corrosion resistance according to DIN50979 - stress stage 1 / CrVI-free)

(1 : 1)

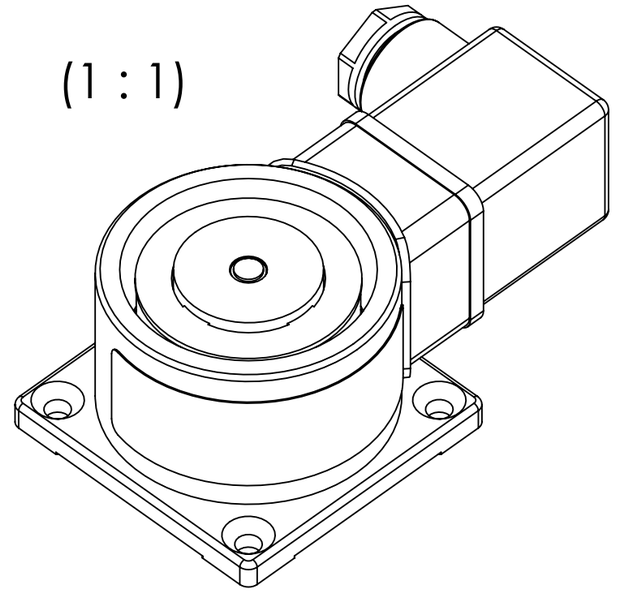

Zust. REV.I.	Anz. Qty.	Änderung REV. DESC.	Datum DATE	Name NAME
c	1x	ÄA.-Nr.3829	09.01.19	wimc
b	ern	Äa.Nr.3185	14.11.16	spop
a	ern	ÄA-Nr.1432	22.11.11	sesb

Projektionsmethode PROJECTION — ISO 128 1 (E)

Werkstückkanten WORK PIECE EDGES ISO 13715

Allgemeintoleranz GENERAL TOLERANCE: ISO 2768 -mK

Oberfläche SURFACE: ISO 1302

	Datum	Name
Bearb. DRAWN	22.11.11	sesb
Gepr. CHECK.	14.01.19	kerm

Nennmassbereich / NOMINAL SIZE RANGE 0,2...0,5 mm

Längenmasse LENGTH DIMENSION ± 0,05 mm

Radien, Fasen RADIA, CHAMFERS ± 0,1 mm

Maßstab / SCALE 1: 1

Art.Nr. / MAT.-NO.

Werkstoff, Ausgangsteil / MATERIAL, INITIAL PART

Benennung / DESCRIPTION

Tuerhaltemagnet

Door holding magnet

KENDRION

Zeichnungsnummer / DRAWING NO.: GT050R002.31 -O

Blatt / PAGE 1

1 Bl. / OF

Ers. f. / REPL. Logocad 16.07.2007 Rev.b

Format / SIZE A3

SolidWorks

Weitergabe sowie Vervielfaeltigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte fuer den Fall der Patenterung oder Gebrauchsmuster Eintragung vorbehalten. (DIN ISO 16016-2002)