

S-Sight



This series simplifies surveillance with high-quality images and enhanced night vision capabilities. Powered by AI (DDA™ Video Analytics and Face Recognition) and equipped with Check Point protection for comprehensive monitoring. Choose from rainbow cameras, Motorized Varifocal options, and Anti-Vandal designs for high-security areas.



I2-340IPS-28

20m IR 4MP Fixed Lens Small Bullet Camera

Equipped with a 2.8mm fixed lens, this 4MP bullet camera is designed for short distance surveillance (up to 20m) in both indoor and outdoor scenarios. With its great performances, reliability and affordable price I2-340IPS-28 camera is the perfect solution for any basic installation.

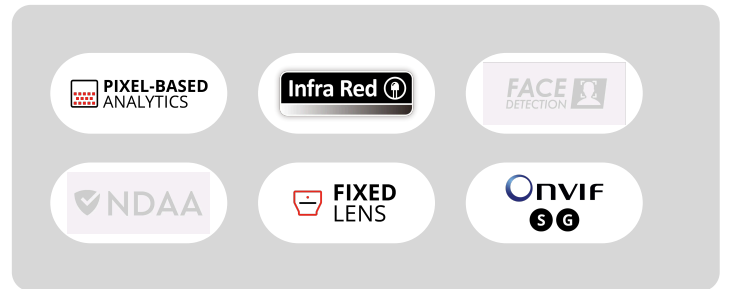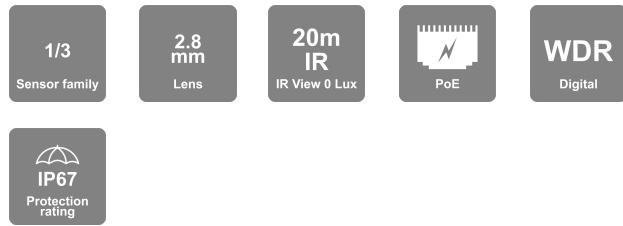

MAIN FEATURES

- I2-340IPS-28 4MP Fixed Bullet Camera with IR LED
- Sensor: 1/2.7" CMOS (16:9)
- Resolution: 2560×1440 25/30FPS (4MP)
- Lens: 2.8mm (110°)
- True Day&Night – ICR
- Illumination: 20m (1 High Power IR LED)
- Compression: H.265 / H.264 / MJPEG
- General Analytics: Camera Tampering
- Standard Analytics (Pixel-Based): Line Crossing, Sterile Area
- Digital WDR, BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 128Gb)
- ONVIF: Profile S/G
- Water Proof: IP67
- Weight: ~390g
- Power: DC12V/~420mA / PoE/~5.4W



<https://provision-isr.com>

SPECIFICATIONS

| 3rd Party Cyber Protection | |
|----------------------------|---|
| General | N/A |
| Protection Methods | N/A |
| NDAA Compliant | |
| NDAA Compliant | No |
| Video | |
| Image Sensor | 1/2.7" CMOS (16:9) |
| Effective Pixels | 2560x1440 |
| Electronic Shutter | 1/25s ~ 1/100000s |
| Day & Night | ICR |
| Min. Illumination | Day: 0.1lux / Night: 0.03lux (@F2.0, AGC On) 0lux with IR on |
| Audio | |
| Audio compression | N/A |
| Communication | N/A |
| Image | |
| Image Settings | AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable |
| Image Enhancement | Digital WDR, BLC, HLC, ROI |
| Noise Reduction | 3D-DNR |
| Image Orientation | Mirror/Flip |
| Privacy Zone | Yes |
| Events and Analytics | |
| Analytics | General Analytics: Camera Tampering Standard Analytics (Pixel-Based): Line Crossing, Sterile Area |
| Motion Detection | Yes |
| Compression | |

| | |
|--------------------------|--|
| Resolution | 4MP (2560x1440) / 3MP (2304x1296) / 2MP (1920x1080) / D1 / QVGA /CIF |
| Frame Rate | 1-25/30FPS |
| Video Compression | H.265 / H.264 / MJPEG** |
| Multi-Stream | Master Stream: 4MP (2560x1440) / 3MP (2304x1296) / 2MP (1~30fps) Sub-Stream: 1MP (1~12/15fps) /QVGA/D1/CIF (1~30fps) Third Stream: QVGA/D1/CIF (1~30fps) |
| Bit Rate | 64Kbps ~ 5Mbps@H.265 / 64Kbps ~ 5Mbps@H.264 |
| Encode Mode | VBR/CBR |
| Image Quality | Five levels under VBR; Free adjustment under CBR |


| Lens | |
|-----------------------------|--------------|
| Lens (Field of View) | 2.8mm (110°) |
| Iris | Fixed Iris |
| Lens Mount | M12 Mount |

| Network | |
|--------------------------|--|
| User Access | Supports simultaneous monitoring for up to 4 users with multi-stream real time transmission |
| Network Protocol | IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS |
| Remote Monitoring | IE Browsing, VMS Software, Provision Cam2 Mobile App |
| Ethernet | 100Mbps |
| ONVIF | Profile S/G |

| Connectivity | |
|---------------------------|---|
| Network | RJ45 (+PoE) |
| Audio Connectivity | No |
| Alarm | No |
| SD Card | Event/Schedule based Main/Substream recording (Up to 128Gb) |
| Wiegand | No |

| | |
|----------------------------|------------------------------|
| Power | DC Socket |
| Analog Video Output | No |
| Housing | |
| PoE | Yes |
| Illumination | 20m (1 High Power IR LED) |
| Power Supply | DC12V/~420mA / PoE/~5.4W |
| Protection Rate | Water Proof: IP67 |
| Work Environment | -30°C~60°C, 10%~90% Humidity |
| Bracket | 3-Axis Bracket |
| Dimensions | 172.2x73.4x74.5mm |
| Weight (gross) | ~390g |
| Hard Reset Button | Yes |


DIMENSIONS

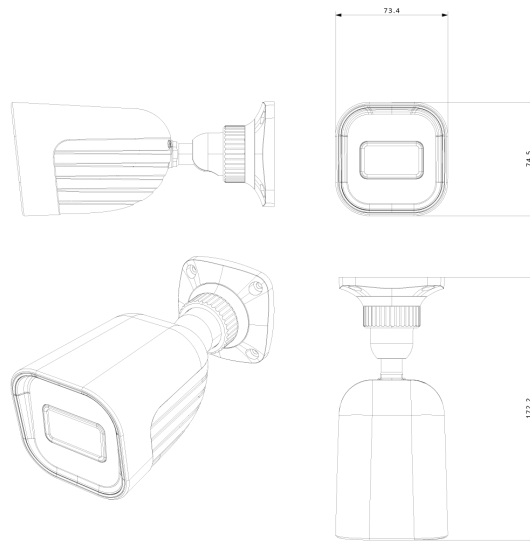

ACCESSORIES



+

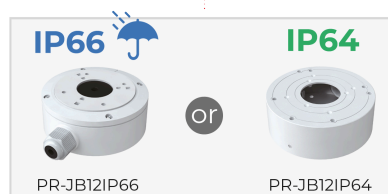

+

