

Declaration of performance

№ 071/2023

According to Construction Products Regulation EU № 305/2011

1. *Unique identification code of the product-type:*

SensoIRIS WS IS

2. *Type Number:*

SensoIRIS WS IS

Description: Intelligent analogue addressable fire alarm wall
sounder with built-in isolator module

3. *Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer*

Fire detection and fire alarm systems installed in and around buildings

4. *Manufacturer*

**Teletek Electronics JSC
2, Iliyansko shose Str.
NPZ Voenna Rampa
1220 Sofia, Bulgaria**

5. *Trading Company*

**Teletek Electronics JSC
2, Iliyansko shose Str.
NPZ Voenna Rampa
1220 Sofia, Bulgaria**

6. *System of assessment*

System 1

7. *Notified Body*

**EVPU a.s.
19 Trencianska Str.
018 51 Nova Dubnica, Slovakia**


Notified Body Number **1293**

Performed **the prescribed tests and evaluation of factory production control according to system 1 and issued the following certificate**

EC Certificate Number **1293- CPR-0705 Rev.1**

8. *No European Technical Assessment has been issued for this product.*

9. *Declared performance*

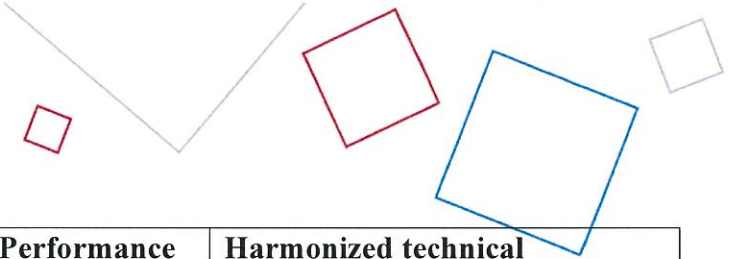

| Essential characteristics | Performance | Harmonized technical specification EN 54-3:2001 EN 54-3:2001/A1:2002 EN 54-3:2001/A2:2006 |
|---|-------------|--|
| Performance under fire condition | Pass | 4.2, 4.3, 5.2, 5.3 |
| Operational reliability | Pass | 4.4, 4.5, 4.6, 5.4 |
| Durability of operational reliability: temperature resistance | Pass | 5.5, 5.6, 5.7, 5.8, 5.9 |
| Durability of operational reliability: humidity resistance | Pass | 5.8, 5.9, 5.10 |
| Durability of operational reliability: corrosion resistance | Pass | 5.11 |
| Durability of operational reliability: shock and vibration resistance | Pass | 5.12 to 5.15 |
| Durability of operational reliability; electrical stability | Pass | 5.16 |
| Durability of operational reliability: resistance to ingress | Pass | 5.17 |

| Essential characteristics | Performance | Harmonized technical specification EN 54-17:2005 EN 54-17:2005/AC:2007 |
|--|-------------|--|
| Performance under fire conditions | Pass | 5.2 |
| Operational reliability | Pass | 4 |
| Durability of operational reliability and response delay: temperature resistance | Pass | 5.4, 5.5 |
| Durability of operational reliability: humidity resistance | Pass | 5.6, 5.7 |
| Durability of operational reliability: shock and vibration resistance | Pass | 5.9 to 5.12 |
| Durability of operational reliability: corrosion resistance | Pass | 5.8 |
| Durability of operational reliability: electrical stability | Pass | 5.3, 5.13 |

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

2, Iliyansko shose Str.
NPZ Voenna Rampa
1220 Sofia, Bulgaria
13.12.2023

