



MCR300-1T-1S-V2

10/100/1000 Base-T to 100/1000 SFP Media Converter

OVERVIEW

The IFS Gigabit Ethernet to SFP Media Converter is designed for the most demanding extended IP network applications offering the flexibility of SFP technology for Gigabit Ethernet transmission over optical fiber.

SFP Technology

The IFS MCR300-1T-1S-V2 converts 10/100/1000Base-T Ethernet on copper to 100Base FX/LX/BX or 1000Base SX/BX/LX/LHX/ZX optical fiber via Small Form-format Pluggable (SFP) technology. This media converter can be custom configured to your exact system design specifications by utilizing a variety of IFS SFP Mini-GBIC modules. IFS SFP Mini-GBIC modules are available in a variety of versions from multi-mode or single mode fiber, 1 or 2 fibers and wide-temperature versions.

Enhanced Smart Link Management

The MCR300-1T-1S-V2 provides Auto MDI/MDI-X on its TP port and a DIP-switch to configure the Link Fault Pass-through function (LFP). The LFP function includes both Link Loss Carry Forward (LLCF) and Link Loss Return (LLR). The LLCF/LLR function combination provides efficient TP and optical transmission media monitoring and enables immediate alarm notification to network administrators in the event of a link problem.

Unified Enclosure Design

The MCR300-1T-1S-V2 is designed with a unified enclosure that can be used in a stand-alone installation or can easily be inserted into the IFS MCR-R15 media converter rack. The IFS Media Converter Rack can provide DC power for up to 15 MCR Series Media Converters.



Details

- 10/100/1000Base-TX
- Auto-negotiation and Auto-MDI/MDI-X
- 9K jumbo frame supported
- 100Base FX/LX/BX or 1000Base SX/BX/LX/LHX/ZX SFP optic compatible
- 1 SFP slot provides custom configuration
- Optical fiber and distance varies by SFP (ordered separately)
- Plug-n-play installation
- LED indicators for easy local network diagnostics
- DIP-switch for LFP function (Enable / Disable) setting
- Unified design for stand-alone or rack mount installation (MCR-R15 chassis)

MCR300-1T-1S-V2

10/100/1000 Base-T to 100/1000 SFP Media Converter

Technical specifications

Geral

Categoria	Comercial
Tipo	Ethernet para SFP
Switch throughput (Mpps)	14.8
Compatível com rack MCR	Sim

Ligações

No. of ports	1
Velocidade do porto	Gigabit
Tipo de porto	10/100/1000
Porta de fibra	1
Tipo de porto de fibra	SFP
Velocidade de porto de fibra	100Base FX/LX/BX or 1000Base SX/BX/LX/LHX/ZX
SFPs Suportados	Séries S2x e S3x
Distância de fibra	Dependente de SFP
Conetor de fibra	LC
Comprimento de onda	Dependente de SFP

Elétrica

Tipo de fonte de alimentação	5 VDC
Consumo de energia	5.6 W
PoE	Não

Físico

Dimensões físicas	97 x 70 x 26 mm
Peso líquido	190 g
Tipo de montagem	Montagem em parede

Ambiental

Temperatura de operação	0 to +50°C
-------------------------	------------

Ethernet

Data Rate	10/100/1000Mbps
OAM	TS-1000, IEEE 802.3ah terminal
Jumbo Packet Size	9K
Flow Control	Half/Full-duplex
Connector	RJ-45 (Auto-MDI/MDI-X)
Cable Type and Distance	10Base-T: 2-pair UTP Cat. 3,4,5, up to 100 m / 100Base-TX: 2-pair UTP Cat. 5, up to 100 m / 1000Base-T : 2-pair UTP Cat. 5/5e/6, up to 100m

LED Indicators & Controls


Power/Status	Green/On - power detected (+5VDC)
10/100/100Base-T port link/activity	Green/On - link established / Green/blinking - active port (TX/RX)
10/100/1000Base-T port speed	Green/On - 1000Mbps full duplex mode operation / Green/Off - 10/100Mbps full duplex mode operation
SFP (Mini-GBIC) port link	Green/On - link established / Green/blinking - active port (TX/RX)
DIP switch	LFP function (Enable/Disable) setting

Standards Compliance

IEEE	IEEE 802.3, 10Base-T / IEEE 802.3u, 100Base-TX / IEEE 802.3ab 1000Base-T / IEEE 802.3z 1000Base-SX/LX/BX
EMI	EN 55022 CLASS A / EN61000-3-2:2006 / EN61000-3-3: 1995+1A:2001+A2:2005
EMS	EN 55024:1998+A1:2001+A2:2003 / IEC 61000-4-2:2001 / IEC 61000-4-3:2008 / IEC 61000-4-4:2004 / IEC 61000-4-5:2005 / IEC 61000-4-6:2008 / IEC 61000-4-8:2001

Accessories

PS5VDC2A-UK	5VDC@2A Wall-mount Power Supply
PS5VDC2A-EU	5VDC@2A Wall-mount Power Supply
MCR-R15	MCR Series Media Converter Chassis

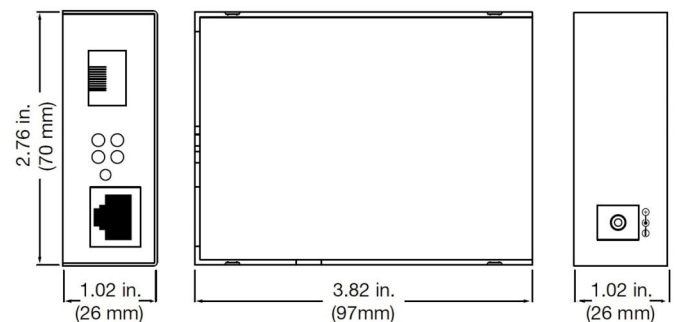

Como empresa de inovação, a Carrier Fire & Security reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 5 August 2022 - 11:32