


# 24+2-Port 10/100 Mbps PoE Switch

PoES-24300C+2G

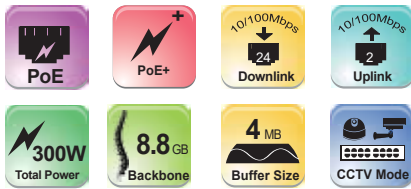

- 24x10/100Mbps PoE Downlink Ports
- 2x10/100/1000Mbps Uplink Ports
- 300W (Avg:12.5W Max 30W per ch)
- Internal Power Supply
- Distance: Up to 100 Meter
- Built-in Surge Protection
- Complies With IEEE802.3af/at
- CCTV mode:
  - Up to 250 meter at 10Mbps
  - Vlan function: no communication among downlink ports
- Rack Mount Bracket Included

## Specifications

MODEL	PoES-24300C+2G	
Interface	Downlink Ports	24 x 10/100Mbps
	Uplink Ports	2 x 10/100/1000Mbps
	SFP Ports	No
PoE	PoE Ports	24
	PoE Standard	IEEE802.3af/at PoE
	PoE Total Power	300W
	Average Power Per Channel	12.5W
	Maximum Power Per Channel	30W
Data Processing	Backbone Bandwidth	8.8Gbps
	Buffer Size	4Mb
	MAC Address Table	16K
	VLAN	Auto (In CCTV Mode)
Network Media	EIA/TIA-568	100Ω STP (Maximum 100m)
	10BASE-T	UTP Category 3, 4, 5 Cable (Maximum 100m)
	100BASE-TX	UTP Category 5, 5e Cable (Maximum 100m)
	1000BASE-T	UTP Category 5e, 6, 7 Cable (Maximum 100m)
Special	CCTV Mode	Selectable Standard/CCTV Mode
	Surge Protector	Built-In (±2KV)
	Wall Bracket	No
	Rack Bracket	Yes
	K-Slot (Anti Theft)	No
Power	PoE Status Monitor	Yes
	Power Supply	100-240VAC
Others	Power Consumption	PoE On: 210W Max. / PoE Off: 10W Max.
	Fan	No
	Dimensions	440*292*43.6mm
	Weight	4.25kg
	Operating Temperature	-0°C-55°C



CCTV Mode + Reset Switch



Status LEDs