

DVR


Provision-ISR DVRs feature the advanced H.264-H265 video compression format for maximum video quality alongside minimum storage volume. Their Dynamic Hybrid function allows installers to decide how the analog channels will work according to the installation needs, making this installation totally dynamic.



SH-16200A5-5L(1U)

16 CH "4 In 1" + 8 CH IP Dynamic Hybrid DVR

Provision-ISR SH-16200A5-5L(1U) is a high quality digital video recorder featuring Dynamic Hybrid Technology. This technology allows the user to decide how the analog channels have to work according to the installation needs. The recorder features 16 alarm inputs + 4 alarm outputs and supports Provision-ISR Standard Video Analytics.

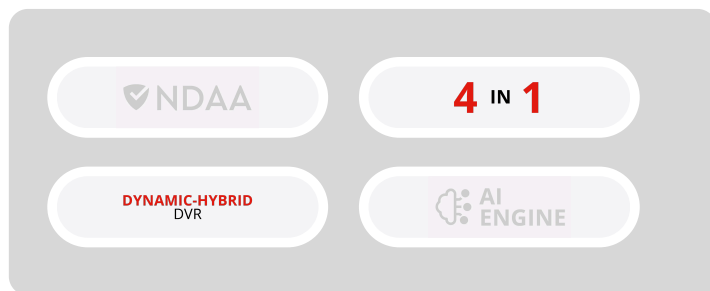

MAIN FEATURES

- Video Input: 16CH Standard BNC + 8CH IP Video Output: HDMI - FHD VGACVBSRecording: HD Analog: 5MP Lite: Up to 10FPS Per Channel / 4MP Lite / 2MP: Up to 12/15FPS Per Channel / 2MP Lite / 1MP: Up to 25/30FPS Per Channel960H: Up to 30/25FPS Per ChannelIP: 5MP and lower: 25/30FPS Per ChannelPlayback: Local: 16Ch SimultaneouslyRemote: 8Ch SimultaneouslyAudio: Input: 8CH + IPC InputsOutput: 1CH + IPC OutputsAlarm: Input: 16+IPCOutput: 4+IPCStorage: 2 x SATA (Up to 8TB each)1 x E-SATA (Up to 8TB each)Network: 1 x RJ-45: 10/100MbpsPTZ Support: RS-485 / CoC / IP-Over NetworkPower Supply: DC12V/2AAalytics: AI by IPC: DDA1 Analytics Supported by the cameraRemarks: The following features are based on firmware v1.3.8 and are subject to firmware version changes.



<https://provision-isr.com>

SPECIFICATIONS

| NDAA Compliant | |
|------------------------------------|--|
| NDAA Compliant | No |
| General | |
| Technology | Dynamic Hybrid |
| Recording Modes | Schedule, Manual, Motion, Sensor, Analytics, POS |
| Format | "All in 1" Hybrid (AHD / CVI / TVI / CVBS + IP) |
| Video Input | |
| Video Input (Max Analog) | 16CH Standard BNC + 8CH IP (Over Network) |
| Video Input (Max IP) | 16CH IP (Over Network) + 8CH Standard BNC |
| 3K Input Support | No |
| Video Output | |
| Video Output | HDMI(1920x1080), VGA (1280x1024, 1024x768), CVBS(Spot) |
| Dual Output | Mirrored |
| Audio | |
| Audio-In | 8CH RCA (2.0 Vp-p, 1 k Ω) (+IP Cameras) |
| Audio-Out | 1CH RCA (2.0 Vp-p, 1 k Ω) (+IP Cameras) |
| Audio Over Coax | No |
| Two Way Audio | Yes |
| Audio Compression | G.711u |
| Events and Analytics | |
| SMD Support | No |
| DDA Analytics (On Analog Channels) | No |
| Pixel Based Analytics | Yes |
| Main Resolution and FPS | |

| | |
|-----------------------------------|---|
| IP Main Stream | 5MP and lower: 25/30FPS Per Channel |
| AHD | 5MP Lite: Up to 10FPS Per Channel, 4MP Lite / 2MP: Up to 12/15FPS Per Channel, 2MP Lite / 1MP: Up to 25/30FPS Per Channel |
| TVI | 5MP Lite: Up to 10FPS Per Channel, 4MP Lite / 2MP: Up to 12/15FPS Per Channel, 2MP Lite / 1MP: Up to 25/30FPS Per Channel |
| CVI | 4MP Lite / 2MP: Up to 15/12FPS Per Channel, 2MP Lite / 1MP: Up to 25/30FPS Per Channel |
| CVBS Main Stream | 960H: Up to 30/25FPS Per Channel |
| Master Stream Over Network | Up to 16Ch@Recording Resolution (Up to 96Mbps) |

| Network (Substream) Resolution and FPS | |
|---|--|
| HD Analog | 1-25/30FPS@1080P Per Channel (FPS Restricted to Master Stream FPS) |
| IP Sub Stream | 1-25/30FPS@D1 Per Channel |
| CVBS Sub Stream | 1-25/30FPS@D1 Per Channel |
| Substreams over Network | Restricted to 96Mbps |

| Remote view | |
|-------------------------|--|
| Max Channel View | 120Ch (Limited to Outgoing Bandwidth Capacity) |

| Video Compression | |
|--------------------------|-------------|
| Video Compression | H.265+H.264 |

| Record | |
|-----------------------|-------------|
| Recording Mode | Dual Stream |

| Remote Applications | |
|----------------------------------|--|
| User Access | 5 Users Online with Professional Authority Management |
| Mobile App | Provision Cam2 for iOS/Android |
| PC/Mac Software | Ossia VMS Standard / Enterprise |
| Plug-in free Web-Browser | Chrome, FireFox, Safari, Edge, Opera (All Limited to 4Ch Live View / Playback) |
| Plug-in based Web-Browser | Internet Explorer |

SH-16200A5-5L(1U)

| Bandwidth | |
|-----------|---|
| Incoming | 64Mbps (For 6 IP Channels) / 32Mbps (For 2 IP Channels) |
| Outgoing | 96Mbps |

| Playback | |
|--------------------------|--|
| Local Playback Channels | 16Ch |
| Remote Playback Channels | 8Ch |
| Search Modes | Time-Slice, Time, Event, File Management, Smart Search |

| Backup | |
|---------------|----------------|
| USB | 2 USB 2.0 Port |
| Backup Format | AVI/DAT |

| Alarm | |
|-------------------|--------|
| Alarm-in | 16+IPC |
| Alarm-out | 4+IPC |
| Alarm Box Support | Yes |

| Storage | |
|------------------------|------|
| HDD Max Capacity | 8TB |
| Total HDD Max Capacity | 24TB |
| Number of HDD | 2 |
| E-Sata | 1 |

| PTZ | |
|---------------------|--|
| Connection | RS-485 / CoC / IP-Over Network |
| Supported Protocols | Pelco D, Pelco P, Samsung, Visca, ONVIF, CoC |
| Supported Controls | Pan, Tilt, Zoom, Preset, Cruise, Scan, Iris, Focus |

SH-16200A5-5L(1U)

| Network | |
|------------------------------|---|
| Ethernet | 100 Mbps (RJ-45) |
| Protocols | TCP/IP, DHCP, DDNS, NTP, SMTP, RTSP, HTTPS, FTP, SNMP, P2P, POS |
| ONVIF | Yes (For IP Channels) |
| Others | |
| Dimensions | W375xD275xH45mm |
| Power Supply | DC12V/2A |
| Operation Temperature | 0°C ~50°C |

DIMENSIONS

