


## WC106W-HF

Shielded Composite 2 + 4 Cable 2 x 0.75 - Halogen free

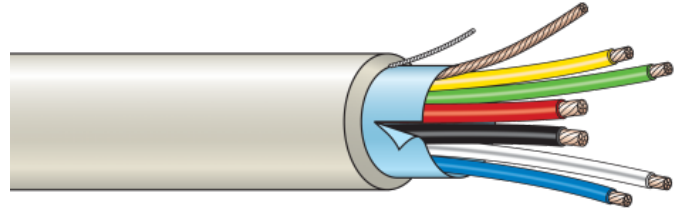

### Standard Features

- For internal or external wiring of warning network systems
- Zero Halogen
- Suitable for gluing to surfaces
- High quality PVC
- Manufactured in accordance with BS4737 section 3.30

# WC106W-HF

Shielded Composite 2 + 4 Cable 2 x 0.75 - Halogen free

## Specifications

Shielding	
Shielded	Yes
Core	
Conductor size	0.22 mm <sup>2</sup> (data) - 0.75 mm <sup>2</sup> (power)
Conductor material	Plain copper
Wire colours	Red, Black (power) Blue, White, Yellow, Green (data)
Jacket	
Jacket colour	White
Jacket thickness	Min. 0.45 mm <sup>2</sup> - max. 0.7 mm <sup>2</sup>
Electrical Characteristics	
Current rating	1 A
Max. conductor DC resistance	92.4 ohm/km @ +20°C
Nominal (mutual) capacitance	90 pF/m
Physical	
Cable length	100 m
No. of wires	6
Environmental	
Halogen free	Yes
Standards & Regulation	
Compliancy	CE

## Ordering Information

Part No.	Description
WC106W-HF	Shielded Composite 2 + 4 Cable 2 x 0.75 - Halogen free