


ATS1210LE

8-16 zone DGP input expander, large plastic housing, EN50131 Grade 3

Data Gathering Panels

Data Gathering Panels (DGP) are used to expand the number of alarm inputs on the system and allow inputs and relays to be connected at a location remote from the ATS Advanced or ATS MASTER panel. DGPs communicate via poll & reply messages and send alarms to the control panel for processing. The DGPs collect information from detectors, door contacts and other similar devices. There are DGPs available for conventional devices, wireless devices as well as for intelligent addressable devices. A special DGP is also available for collecting the information for either four doors or lifts.

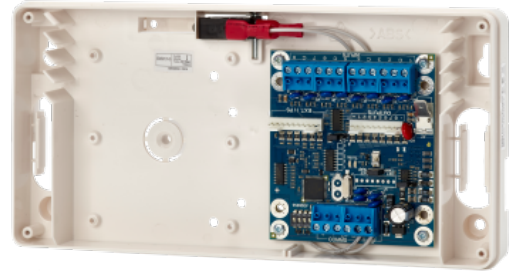

System databus connection

The system databus is used to connect Data Gathering Panels (to provide extra zones) and Arming Stations to the ATS Advanced or ATS MASTER control panel. Remote devices can be up to 1.5 km from an ATS control panel. Arming stations and Data Gathering Panels must be connected via a 2 pair twisted shielded data cable from the system databus connection. (WCAT 52 is recommended). The shield of the data cable should be connected to earth at the ATS control panel and should be left disconnected at any other end.

Functionality

Should a failure in communications occur, the Data Gathering Panel remembers the last alarm state for connected detectors, helping to identify possible reasons for faults. Up to 15 DGP's can be connected directly to the Advisor Master panel and up to 8 to the ATS Advanced control panel. For every DGP expanded to more than 16 inputs, the total number of Data Gathering Panels in a system reduces by one. If a system has all its Data Gathering Panels fully expanded to 32 inputs, the physical number of Data Gathering Panels in a system becomes 8.

Product Overview

8 -16 zone & output DGP expander without PSU in large plastic enclosure, EN50131 Grade 3 & PD6662:2010. Depending on the basic capacity of the control panel up to 15 input expanders can be used at a maximum distance of 1,5km. The product is provided in the ATS1647 plastic housing.

Standard Features

- 8 inputs on board
- 8 OC outputs on board
- Large plastic enclosure with opening tamper sensors
- Expandable to 16 inputs
- 8 OC outputs on board
- Expandable to 16 outputs
- ATS1647 Plastic enclosure with tamper protection
- EN50131 Grade 3
- PD6662:2010

ATS1210LE

8-16 zone DGP input expander, large plastic housing, EN50131 Grade 3

Specifications

General	
Expander type	Input expander
Product line	Advisor Advanced, ATS Master
Connection type	Databus connection
Max. distance from panel	1.5 km
Max. per panel	15
Specified cable	WCAT 52/54
Inputs	
Total	16
Onboard	8
Expandable	8 (1x ATS1202)
Outputs	
Total	16
Onboard	8
Expandable	8
Type of outputs	Open Collector
Relays	Via ATS1810 / ATS1811
Maximum number of outputs	16
System	
Addressing	DIP Switches
Electrical	
Operating voltage	10.5 to 13.8 VDC Powered by the panel bus
Current consumption	53 mA max.
Integrated power supply	No
Physical	
Physical dimensions	120 x 240 x 38 mm
Net weight	390 gr
Environmental	
Operating temperature	-10 to +55°C
Relative humidity	< 95% non condensing
IP rating	IP30
Standards & regulation	
Certification	EN50131 Grade 3

Ordering Information

Part No.	Description
ATS1210LE	8-16 zone DGP input expander, large plastic housing, EN50131 Grade 3 Class II
ATS1210E	8-16 zone DGP input expander, small plastic housing, EN50131 Grade 3 Class II
ATS1211	8-ZONE INPUT EXP IN METAL HSG
ATS1201E	8-32 zones DGP input expander, 3A power supply, medium metal housing, EN Grade 3 Class II